


# Construction

## ALUMINIUM LOADING RAMPS CLEAN PASS

for wheeled and rubber tracked vehicles

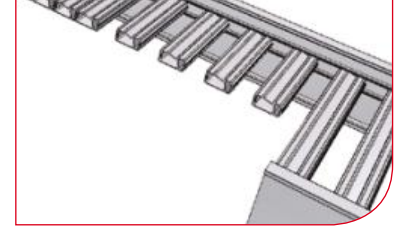

### TECHNICAL DETAILS

Side edges	2 or none
Maximum load capacity	12.173 kg
Length	from 2,5 to 4,5 m
Width	from 360 to 510 mm

TYPE	LOAD CAPACITY FOR VEHICLES WITH WHEELBASE			TOTAL LENGTH	WIDTH		WEIGHT PER RAMP
	1,0 m	1,5 m	2,0 m		INTERNAL	EXTERNAL	
	kg				mm	mm	
100.25.D	2650	2.850	2.850	2.500	300	360	20
100.30.D	2000	2.300	2.300	3.000	300	360	24
100.35.D	1.600	1.800	1.970	3.500	300	360	28
100.40.D	1.300	1.500	1.700	4.000	300	360	32
115.25.D	3.400	3.680	3.680	2.500	300	360	22
115.30.D	2.600	3.000	3.000	3.000	300	360	26
115.35.D	2.100	2.370	2.500	3.500	300	360	30
115.40.D	1.750	1.950	2.170	4.000	300	360	40
115.45.D	1.500	1.650	1.800	4.500	300	360	45
125.25.D	5.000	5.400	5.400	2.500	350	410	27
125.30.D	3.300	4.500	4.500	3.000	350	410	32
125.35.D	3.000	3.500	3.560	3.500	350	410	37
125.40.D	2.500	2.900	3.070	4.000	350	410	42
125.45.D	2.000	2.450	2.570	4.500	350	410	47
140.25.D	5.888	6.251	6.251	2.500	400	460	33
140.30.D	4.429	5.049	5.049	3.000	400	460	39
140.35.D	3.544	4.013	4.234	3.500	400	460	46
140.40.D	2.952	3.278	3.646	4.000	400	460	52
140.45.D	2.529	2.769	3.044	4.500	400	460	58
155.25.D	6.930	7.420	7.420	2.500	400	460	36
155.30.D	5.250	6.020	6.020	3.000	400	460	41
155.35.D	4.220	4.770	5.060	3.500	400	460	48
155.40.D	3.530	3.910	4.360	4.000	400	460	54
155.45.D	3.030	3.310	3.640	4.500	400	460	60
170.25.D	10.000	10.000	10.000	2.500	450	510	41
170.30.D	7.300	8.300	8.400	3.000	450	510	49
170.35.D	5.700	6.600	7.200	3.500	450	510	58
170.40.D	5.000	5.600	6.200	4.000	450	510	65
170.45.D	4.300	4.700	5.100	4.500	450	510	74
180.25.D	11.466	12.173	12.173	2.500	450	510	42
180.30.D	8.624	9.832	9.832	3.000	450	510	50
180.35.D	6.902	7.815	8.246	3.500	450	510	59
180.40.D	5.749	6.384	7.101	4.000	450	510	67
180.45.D	4.325	5.392	5.928	4.500	450	510	76