


Gardening

RAMPS 45 SERIES: FOLDING

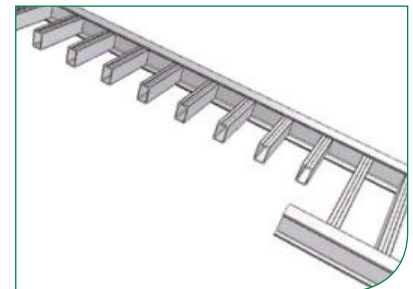

TECHNICAL DETAILS


Side edges	none
Maximum load capacity	550 kg
Length	from 2.0 to 3.0 m
Width	300 mm

TYPE	LOAD CAPACITY FOR VEHICLES WITH WHEELBASE		DIMENSIONS				WEIGHT PER RAMP
	1,0 m	1,5 m	L	B	L1	H	
	kg		mm				kg
45.10.20	550	550	2.000	300	1.010	166	7
45.12.25	550	550	2.500	300	1.260	166	9
45.15.30	400	450	3.000	300	1.510	166	11

Gardening

RAMPS 45 SERIES: FOLDING

Curve

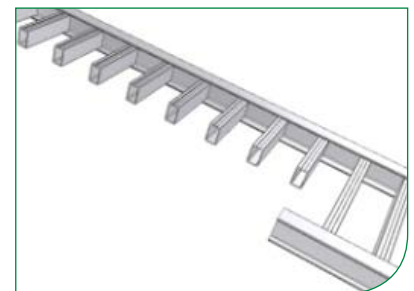

TECHNICAL DETAILS


Side edges	none
Maximum load capacity	550 kg
Length	from 2.0 to 3.0 m
Width	300 mm

TYPE	LOAD CAPACITY FOR VEHICLES WITH WHEELBASE		DIMENSIONS				WEIGHT PER RAMP
	1,0 m	1,5 m	L	B	L1	H	
	kg		mm				
45.10.20 C	550	550	2.000	300	1.010	188	7
45.12.25 C	550	550	2.500	300	1.260	188	9
45.15.30 C	400	450	3.000	300	1.510	188	11

Gardening

RAMPS 45 SERIES: FOLDING

Bridge-type flat surface

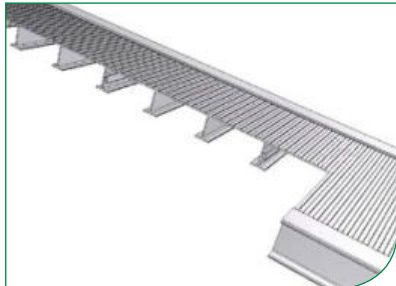

TECHNICAL DETAILS

Side edges	none
Maximum load capacity	550 kg
Length	from 2.0 to 3.0 m
Width	300 mm

TYPE	LOAD CAPACITY FOR VEHICLES WITH WHEELBASE		DIMENSIONS				WEIGHT PER RAMP
	1,0 m	1,5 m	L	B	L1	H	
	kg		mm				kg
45.10.20 P	550	550	2.000	300	1.010	166	9
45.12.25 P	550	550	2.500	300	1.260	166	11
45.15.30 P	400	450	3.000	300	1.510	166	13

Glossary:

- 45:** beam height
- 15:** length of the ramp folded
- 30:** length of the ramp extended
- C:** curve (specific for garden machine)
- P:** bridge-type flat surface (specific for small wheel vehicle or trolley)

- L:** length of the ramp extended
- B:** width of the ramp
- L1:** length of the ramp folded
- H:** height of the ramp folded