


Automotive

SINGLE LOADING CHUTE

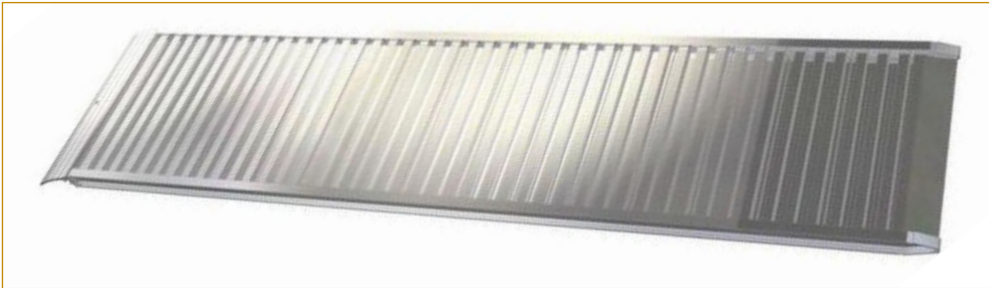

TECHNICAL DETAILS

Side edges	none
Maximum load capacity	500 kg
Length	from 2,5 to 4,0 m
Width	from 600 to 800 mm

TYPE	LOAD CAPACITY	LENGTH	USEFUL WIDTH	WEIGHT
	kg	mm	mm	kg
30.25.60	300	2.500	600	21
30.25.80	300	2.500	800	26
30.30.60	300	3.000	600	26
30.30.80	300	3.000	800	31
30.35.60	300	3.500	600	31
30.35.80	300	3.500	800	37
30.40.60	300	4.000	600	36
30.40.80	300	4.000	800	44
50.25.60	500	2.500	600	22
50.25.80	500	2.500	800	27
50.30.60	500	3.000	600	28
50.30.80	500	3.000	800	34
50.35.60	500	3.500	600	32
50.35.80	500	3.500	800	39
50.40.60	500	4.000	600	38
50.40.80	500	4.000	800	46

Automotive

SINGLE LOADING CHUTE with bridge-type flat surface



TECHNICAL DETAILS

Side edges	none
Maximum load capacity	1000 kg
Length	from 1470 to 4000 mm
Width	from 600 to 1000 mm

MODEL	LOAD CAPACITY	LENGTH	USEFUL WIDTH	WEIGHT
	kg	mm	mm	kg
30.25.60 / P	300	2.500	600	28
30.25.80 / P	300	2.500	800	35
30.30.60 / P	300	3.000	600	33
30.30.80 / P	300	3.000	800	42
30.35.60 / P	300	3.500	600	40
30.35.80 / P	300	3.500	800	51
30.40.60 / P	300	4.000	600	47
30.40.80 / P	300	4.000	800	58
50.25.60 / P	500	2.500	600	29
50.25.80 / P	500	2.500	800	36
50.30.60 / P	500	3.000	600	36
50.30.80 / P	500	3.000	800	45
50.35.60 / P	500	3.500	600	42
50.35.80 / P	500	3.500	800	52
85.1470.60.P	1000	1470	600	17
85.1870.60.P	1000	1870	600	20
85.2470.60.P	1000	2470	600	27
85.2870.60.P	1000	2870	600	31
85.3270.60.P	1000	3270	600	35
85.1470.75.P	800	1470	750	20
85.1870.75.P	800	1870	750	24
85.2470.75.P	800	2470	750	33
85.2870.75.P	800	2870	750	37
85.3270.75.P	800	3270	750	41
85.1470.100.P	550	1470	1000	26
85.1870.100.P	550	1870	1000	32
85.2470.100.P	550	2470	1000	41
85.2870.100.P	550	2870	1000	47
85.3270.100.P	550	3270	1000	53