

Performance and productivity

- Best load capacities
- Self-locking rear axle differential (limited slip 45%)

Powerful and robust

- High strength monoblock chassis
- Hydrostatic transmission and electronic inching pedal for controlled advancement

Comfort and ergonomomy

- Anti-tipping device with hazardous movement block
- High safety cab
- Smart control 4 in 1 joystick



HTL 7210



TELEHANDLER



PERFORMANCES

Maximum lift capacity	7200 kg
Lift capacity to full height	3800 kg
Lift capacity at full reach	2000 kg
Maximum fork height	9.5 m
Reach at maximum fork height	0.7 m
Maximum forward reach	5.4 m




DIMENSIONS

A Length	5.91 m
B Width	2.38 m
C Height	2.49 m
D Wheelbase	2.95 m
E Ground clearance	44 cm
F Track width	1.92 m
G Cab width	0.94 m
Reach at maximum fork height	0.7 m
Lower rotation of forks	134 °
Turning radius (outside wheels)	4.4 m
Weight with forks	12200 kg
Tyres type	18x22.5"



ENGINE

Engine model	FPT TIER III
Engine Capacity	4500 cm3
Engine power output	93kW @ 2200rpm
Engine torque	525Nm @ 1250rpm
Transmission type	Hydrostatic
Fuel tank	105 l
Engine oil	10 l

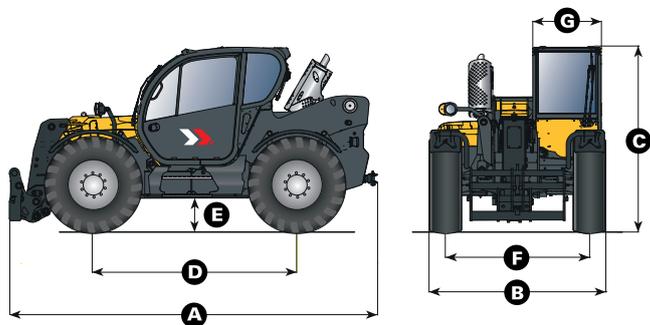

STANDARD EQUIPMENT

- Colour LCD display
- Hydrostatic transmission
- 4 wheel drive and steer
- Simultaneous and proportional controls for boom / telescopic arm / excavation and accessories movements
- Safety valves on hydraulic jacks
- Auxiliary hydraulic system
- Anti-tipping device with hazardous movement block
- Soundproof closed cab, ROPS-FOPS approved, with heating

OPTIONS AND ACCESSORIES

- Winches
- Jibs
- Forks
- Buckets
- Air conditioning
- LED lights on boom
- Metal windscreen protector (FOPS)
- Tilt corrector
- Reverse fan
- Automatic wheels alignment
- Outriggers

