


With Us, You can



HIGH
GREEN
SAFE

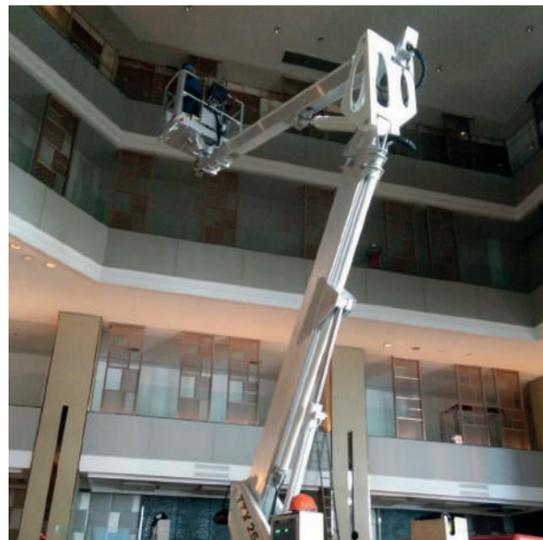

25 m



10,6 m



250 kg



Bi-energy
Eco



Crawlers
Wheels



STANDARD EQUIPMENT

- CANBUS electronics
- Hydraulic transmission on non-marking rubber tracks with 2 speeds
- Hydraulic set-up with 4 independent outriggers, of the rotating type
- 2 aluminium made articulated double telescopic booms
- Safe working load 120/250 kg
- Aluminium cage 140x70x110 cm
- Cage with automatic self-levelling
- Cage with hydraulic rotation 90° + 90°
- Cage equipped with support of fast disassembling for narrow passages
- Boom slewing under any condition of load and set-up at 360°
- Area limiting system according to load and set-up (supplementary moment sensing system)
- Electric and proportional controls and dual panel: cage panel and ground panel
- 230VAC electric plug on the cage
- CE Mark homologation certificates, manuals, stickers and spares book in English language




HYDRAULIC WIRE-WINCH OF 250 KG



CUSTOMIZED COLOURS



AIR/WATER SUPPLEMENTARY LINE ALONG THE BOOM WITH INTERNAL HOSE




LED LIGHT



PROTECTION OF OUTRIGGERS' CYLINDERS



RADIO CONTROL



AUTOMATIC SET-UP AND SELF-LEVELLING OF THE OUTRIGGERS



INTER-PHONIC COMMUNICATION SYSTEM



BASKET ANTI-COLLISION KIT WITH ULTRASONIC SENSORS AND LASERS



ELECTRONIC ANEMOMETER



CONTROL FOOT PEDAL ON THE CAGE



DRINK HOLDER IN THE BASKET



PADS FOR OUTRIGGERS



HANDS HEATER IN THE BASKET



"RETURN TO HOME" FUNCTION



EMERGENCY ELECTROPUMP KIT



DIAGNOSTIC CABLE KIT



24+6 MONTHS OF WARRANTY ON THE BATTERY



LOAD CELL



GROUNDING CABLE INSIDE THE BOOM



FLASHING LIGHTS ON THE STABILIZERS



BASKET STAIRS

